



SUMTER PLUS

Product Specifications/ Especificaciones del Producto

Style Name/Number / Nombre de estilo / Número 0225V/Sumter Plus Plank

Construction / Construcción Class III High Performance LVP

Wear Layer Thickness / Espesor de la capa 8 mil (0.20 mm)

Overall Thickness / Espesor Total 2 mm

Actual Size / Tamaño Real 17.78 x 121.92 cms

Finish OptiClean Urethane

Installation / Instalación Direct Glue

Recommended Adhesive/Adhesivo Recomendado Shaw 200 or S150

Packaging / Empaque

Square Feet per Carton m2 xcaja 3.25m2 xcaja

Cartons per Pallet Cajas xpallet 80 cartons

Testing / Pruebas

Slip Resistance / ASTM D 2047 / Resist. al deslizamiento >0,6

Dimensional Stability / ASTM F2199 / Estabilidad less than 0.020"/ft.

Residual Indentation / ASTM F1914 / Passes

Flexibility / ASTM F 137 / Flexibilidad Passes, 6mm mandrel

Resistance to Heat / ASTM F 1514 / Resistencia al Calor Passes

Resistance to Light / ASTM F 1515 / Resistencia a la Luz Passes

Resistance to Chemicals/ASTM F 925/Resist. a Químicos 5 min = No Change, 24 hr = No Change

Radiant Flux / ASTM 648 / >0.45 watts/cm2, NFPA Class I


Smoke Density / ASTM E 662 / Densidad de Humo Passes, <450

Warranty / Garantía

15 year residential warranty, 5 year light commercial warranty

15 años Garantía Residencial, 5 años Garantía Comercial

Uncommon Ground is a high performance luxury vinyl plank featuring our exclusive ExoGuard™ quartz-enhanced urethane finish that protects against commercial traffic and requires no polish. State of the art digital imaging technology allows for precise reproduction of domestic and exotic woods for flooring that looks real but tolerates wet maintenance that natural materials cannot handle

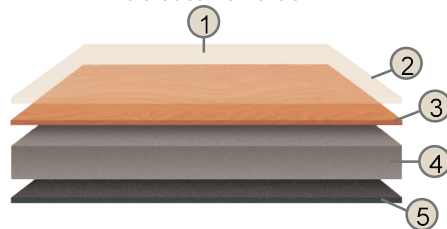

- 1.ExoGuard™ Quartz-Enhanced Urethane
- 2.Clear Wear Layer
- 3.High Resolution Image Layer
- 4.Commercial Flooring Base
- 5.Commercial Backing Layer

PISO DE VINILO SUMTER PLUS