

Turbo

ALFOMBRA DE ROLLO

TURBO

Alfombra de rollo





9629



9623



TURBO				
Manufacturing process	Tufted			ISO 2424
Gauge	5/32" Loop			
Pilecomposition	100% PP			ISO 2424
Primary backing	Woven PP			ISO 2424
Secondary backing	AB + Felt			ISO 2424
Width	400 cm, 500 cm		± 1%	EN 986
Pile weight	ca. 370 gr/m²			ISO 8543
Total weight	AB ca. 1403 gr/m²	Felt ca. 1425 gr/m²	± 15%	ISO 8543
Pile height	ca. 4,0 mm			ISO 1765
Total height	AB ca. 6,0 mm	Felt ca. 6,5 mm	+ 15% / -10%	ISO 1765
Number of knots	ca. 93.500 /m²		+ 10% / -7,5%	ISO 1763
Fire classification	AB Cfl-S1 glued	Felt Cfl-S1 glued	EN 13501-1	
Light fastness	5			105-B02
Wearability	≥ 4			105-X12
Water fastness	≥ 4			105-E01
Thermal resistance	0,120 m² K/W			ISO 8302
Sound isulation	10,0 dB			ISO 10140
GUT Nr.	AB 89ECF791	Felt 25FD25DE		

Floorsymbols AB

Floorsymbols Vlies




Servicio de instalación



Adhesivo de contacto con base en caucho sintético y solventes orgánicos. Adhesivo multipropósito, líquido medianamente viscoso, especialmente formulado para adherencia de textiles como las alfombras de rollo.

CERTIFICACIONES

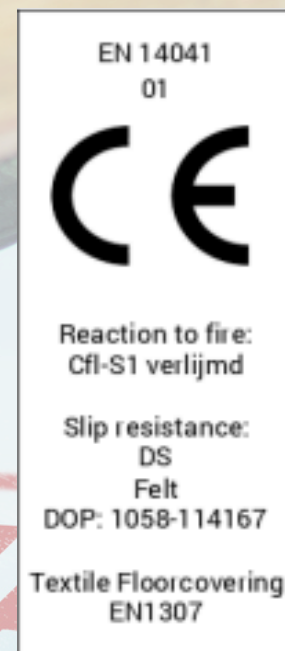

Garantía de 5 años contra el desgaste, decoloración, delaminación, estática y deshilachamiento.

Conoce todos nuestros productos

Alfombra
Modular



Alfombra
Rollo



Gramas
Sintéticas



Pisos de
Vinilo



Tapetes
decorativos



Automotriz

