

A modern office workspace featuring a dark wood desk with a white modular shelving unit in the background. The shelving unit has a prominent lime green horizontal band. A white office chair is positioned behind the desk. The floor is covered in a dark, textured carpet. Large windows on the left and right sides provide a view of a cityscape.

# Graphic Unique

ALFOMBRA MODULAR

50 cm x 50 cm


GRIS CLARO 78

GRIS MEDIO 76

ROJO OSC 120

AZUL 83

VERDE OSC 142

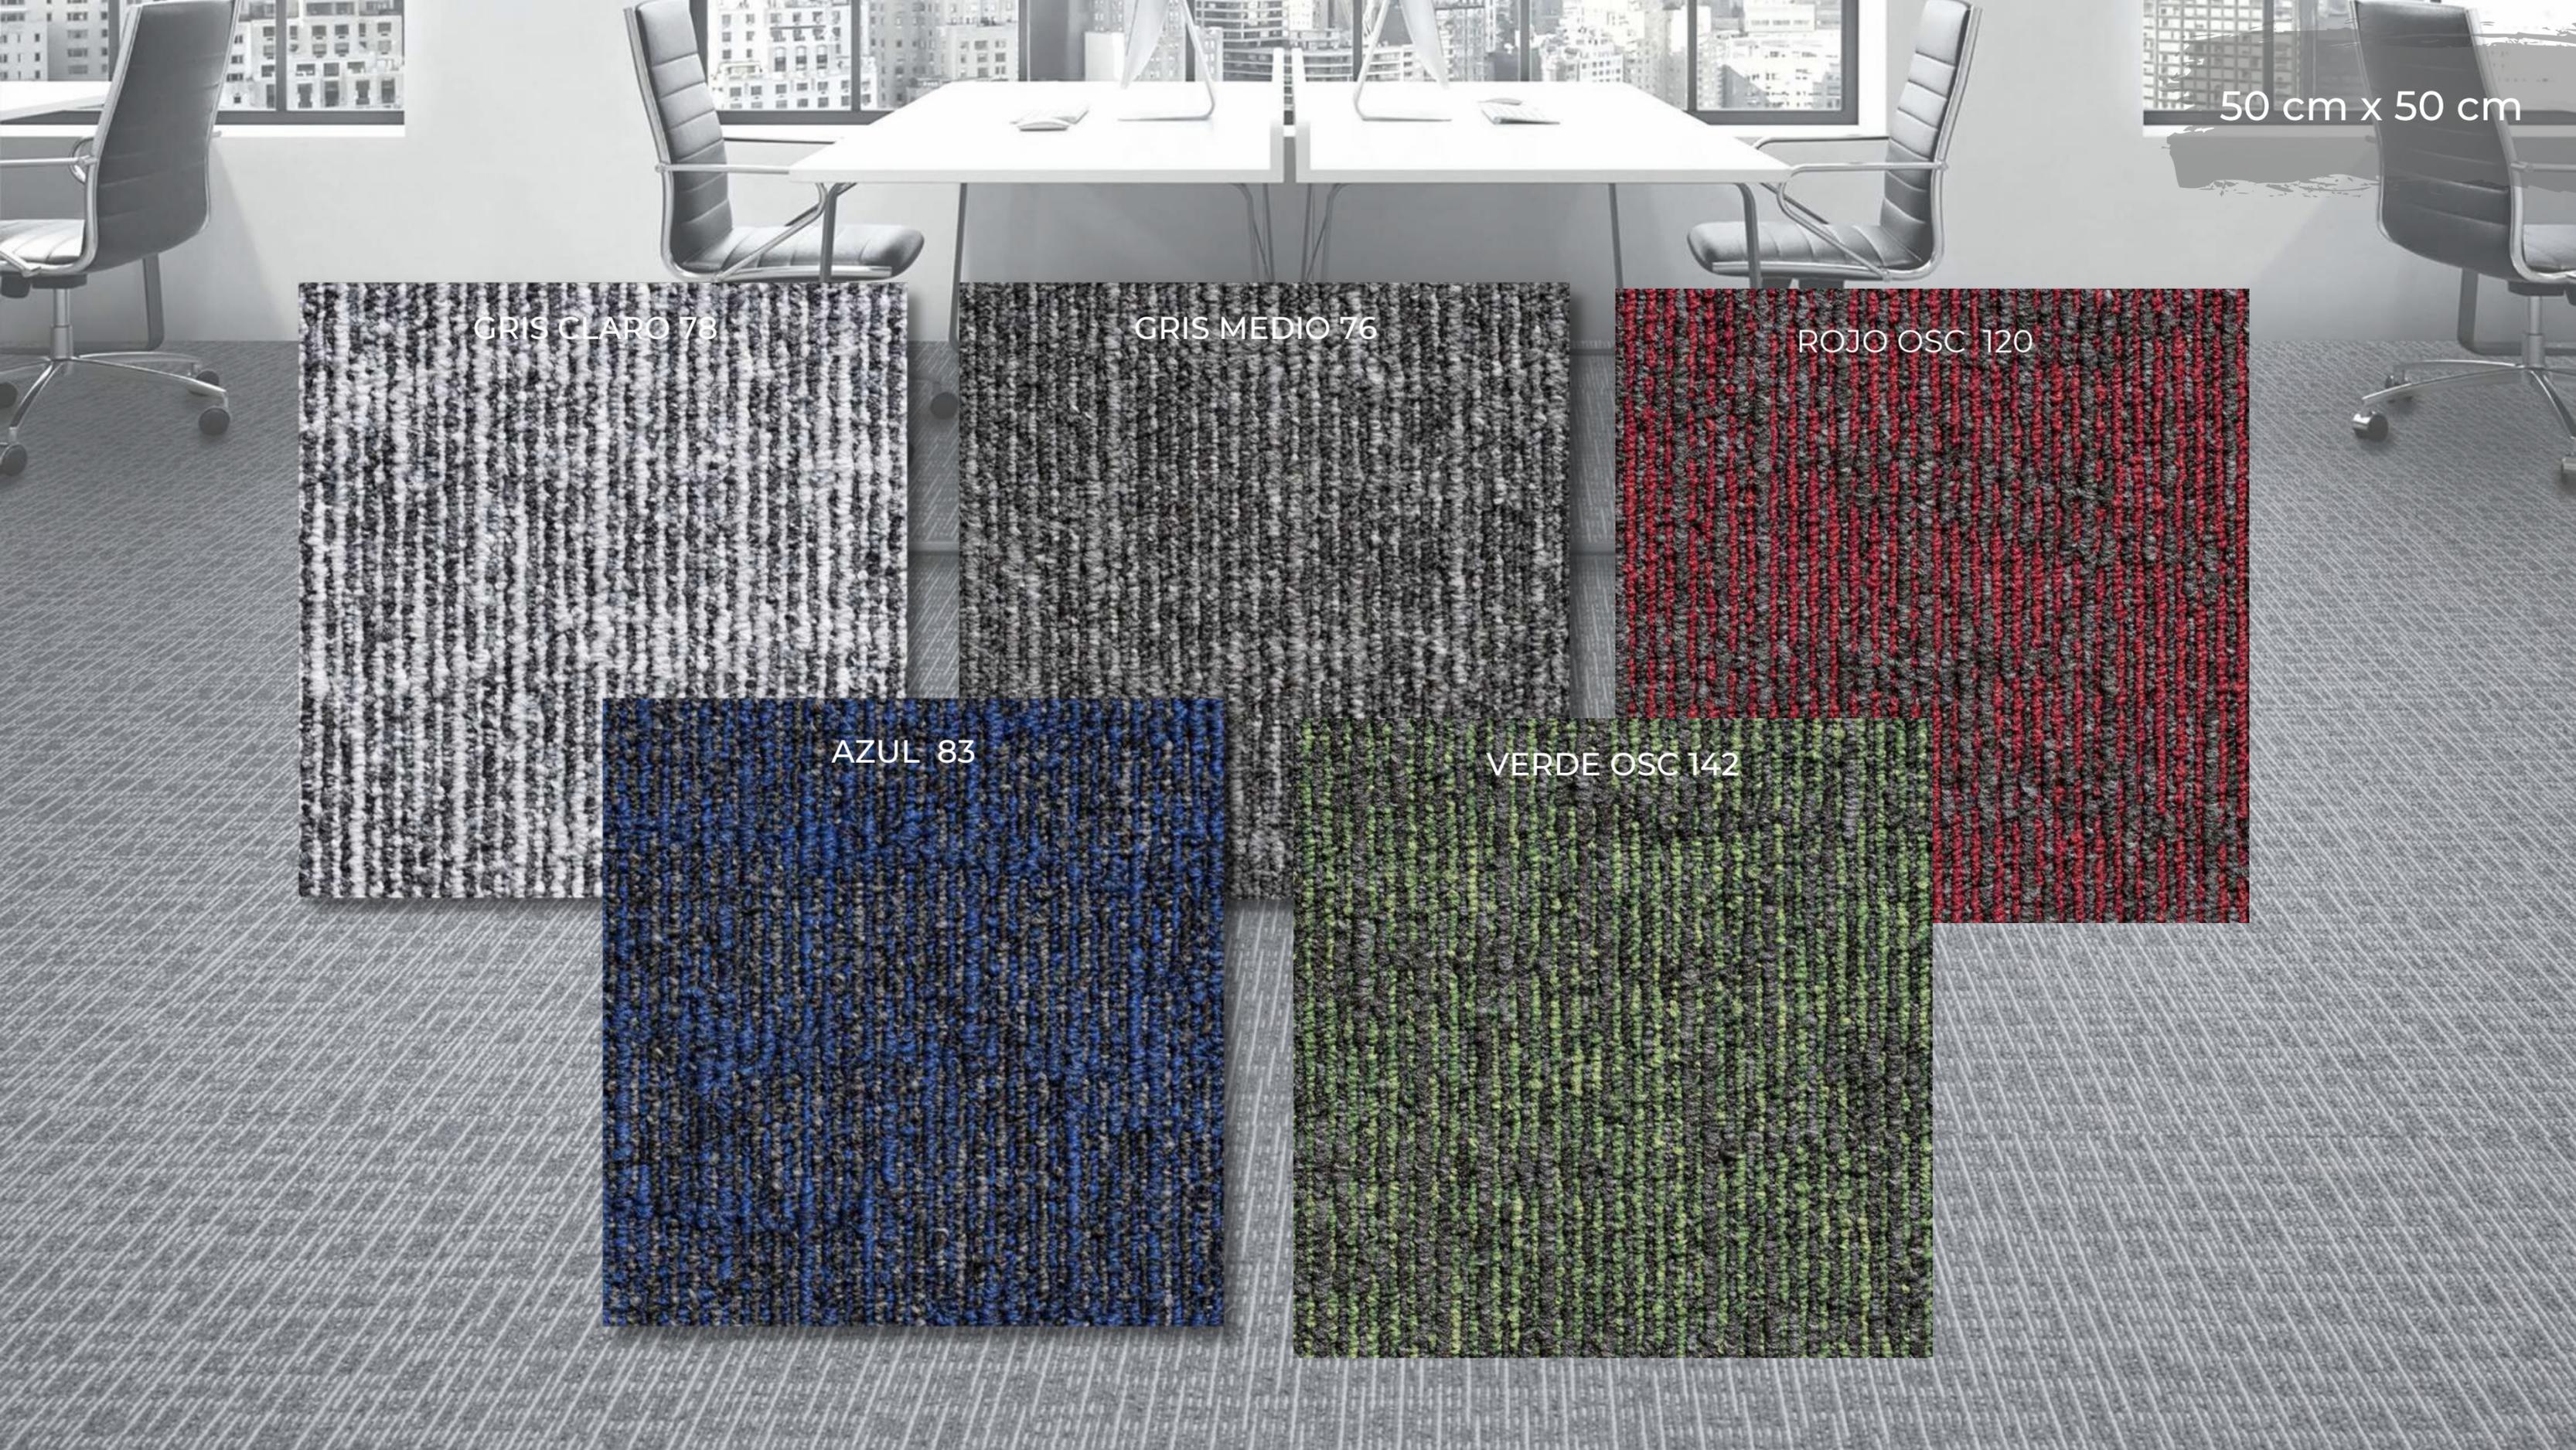



GRIS MED 76  
VERDE 142



CRIS CLARO 78



ROJO OSC 120





## Graphic Unique

<b>Galga</b>	1/10 loop pile		ISO 2424				
<b>Composición fibra</b>	100% PA SDN		ISO 2424				
<b>Backing Primario</b>	Non Woven		ISO 2424				
<b>Acabado</b>	Bitumen		ISO 2424				
<b>Ancho</b>	50 x 50 cm	± 0.2%	EN 984				
<b>Densidad</b>	0,131 gr/cm <sup>3</sup>		ISO 8543				
<b>Peso del hilo</b>	720 gr/m <sup>2</sup>		ISO 8543				
<b>Peso total</b>	Bitumen : 4525 gr/m <sup>2</sup>	± 15%	ISO 8543				
<b>Altura del hilo</b>	3 mm	± 2 mm	ISO 1766				
<b>Altura total</b>	Bitumen : 6 mm		ISO 1765				
<b>Puntadas</b>	240.881/m <sup>2</sup>	-7.5% .+10%	ISO 1763				
<b>Clasificación al fuego</b>	Bfl-S1	EN 13501-1					
<b>Área de Uso</b>	Heavy project use (33)		EN 1307				
<b>Absorción acústica</b>	<b>Hz</b>		ISO 11654				
	125	250	500	1000	2000	4000	
	0.00	0.00	0.05	0.15	0.25	0.20	
<b>Absorción acústica al sonido αW</b>	0,15 αW		ISO 11654				
<b>Aislamiento acústico</b>	Ca. 28 dB		ISO 10140				
<b>Resistencia térmica</b>	Ca. 0.07 M <sup>2</sup> KW		ISO 8302				
<b>Solidez a la luz</b>	≥ 5		105-B02				
<b>Resistencia a la fricción</b>	≥ 4		105-X12				
<b>Resistencia al agua</b>	≥ 4		105-E01				
<b>Carga electrostática</b>	<2 kV		ISO 6356				
<b>Clasificación al confort</b>	LC3		EN 1307				
<b>Pictures</b>	www.condorcontract.com						


## Clasificación



# CERTIFICACIONES ALFOMBRA MODULAR UNIQUE



2018  
Condor Carpets  
Euroweg 3  
8061 SB Hasselt  
EN1307  
DOP: C-003RBU232  
Reaction to fire:  
Bfl-s1  
Slip resistance: DS  
Resilient floor  
covering to be  
used within a  
building

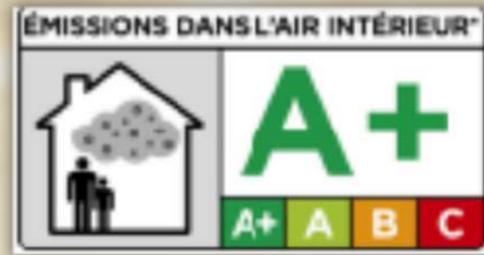

Garantía de 10 años contra defectos de fabricación, fallas ocultas en el producto y desgaste anormal debido al uso.

CERTIFIED